

HPRC2800W for DJI Matrice 300 RTK (Zenmuse H30/H30T version) S-M300-2800W-04



- 1** DJI Matrice 300 RTK in Landing Mode (2 Gimbal and 2 Batteries mounted)
- 2** DJI Smart Controller Enterprise (Battery Attached)
- 3** Zenmuse L1
- 4** Zenmuse P1
- 5** H20/H20T Gimbal

- 6** Propellers
- 7** WB37 Intelligent Battery
- 8** TB60 Intelligent Flight Battery
- 9** Zenmuse H30/H30T



TECHNICAL FEATURES

Dimension:

Internal dimension
748,6x524,6x454,6(mm) - 29.47x20.65x17.9(in)
External dimension
813,3x586,5x480,5(mm) - 32.02x23.09x18.92(in)

Weight:


empty: 13,25kg - 29.22lbs
with cubed foam: 17,43kg - 38.43lbs

Temperature rating:

Minimum Maximum
-40°C -40°F +80°C +176°F



TECHNICAL DRAWING

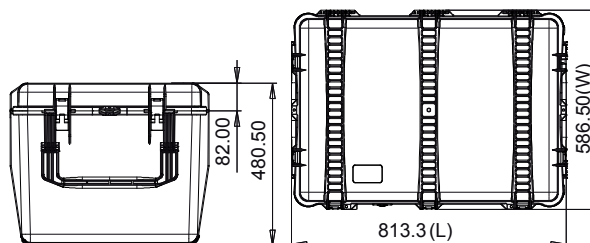

www.hprc.it
info@hprc.it

USA office and warehouse:
HPRC USA
110 Chestnut Ridge Rd. #314
Montvale, NJ 07645
Phone +1(201) 989-3353



APPROVALS
ATA 300
IP67
STANAG 4280
DS 81-41

TEST
DROP
IMPACT
HANDLE
WATERTIGHT INTEGRITY
UV COLOR AND MATERIAL
PROTECTION

Plaber s.r.l. - HPRC cases
Via Div Tridentina, 10
I-36061 Bassano del Grappa
Vicenza - Italy
Tel +39 0424 809150

